


## Micro-perforate in running direction

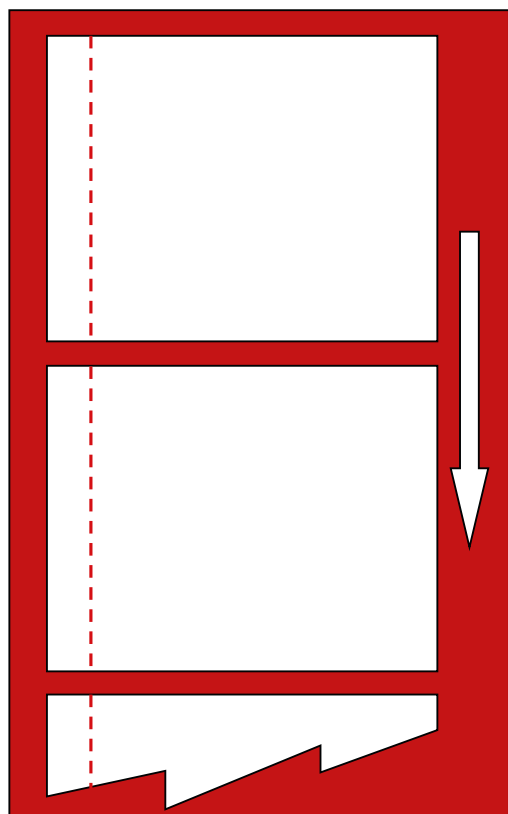

### Specifications:

Tolerance:	+/- 1/16 inch (1.6 mm) side-to-side
Positioning:	Operator adjusted side-to-side
Std. blade:	72 tooth per inch Operator changeable
Height:	Adds 4 inches (102 mm) to height of unwinder
Weight:	10 lbs. (4.5 kg)
Mounting:	Mounts on unwinder One or two across web {no less than 1 inch (25 mm) between}
Perf. type:	Crush cut Adjustable crush pressure

The Tecnau running micro-perforator option is ideal for applications that require perforated forms or tear-out pages. This running micro-perforator option is compatible with Tecnau's SheetFeeder unwinders.

Perforation is performed by one or two perforating wheels ("perf wheels") mounted on a shaft assembly on the unwinder. When perforation is required, the perforating option is engaged with a simple operator procedure. For applications that do not require perforation, the perf wheels are disengaged by the operator.

The running perforator offers micro-perforating capability in the running direction of the web. Depending on the form-to-web orientation, applications such as tear-out pages for bound workbooks, manuals and billing remittance stubs may be enabled.

Significant benefits of the running perforator option include:

- **Reduced paper expense**
- **Reduced forms inventory**
- **Reduced downtime to change stock**