

BAGHERA


SLITTER

REWINDER

**THE ESSENTIAL
IN COMPACT VERSION**



printing & converting innovations

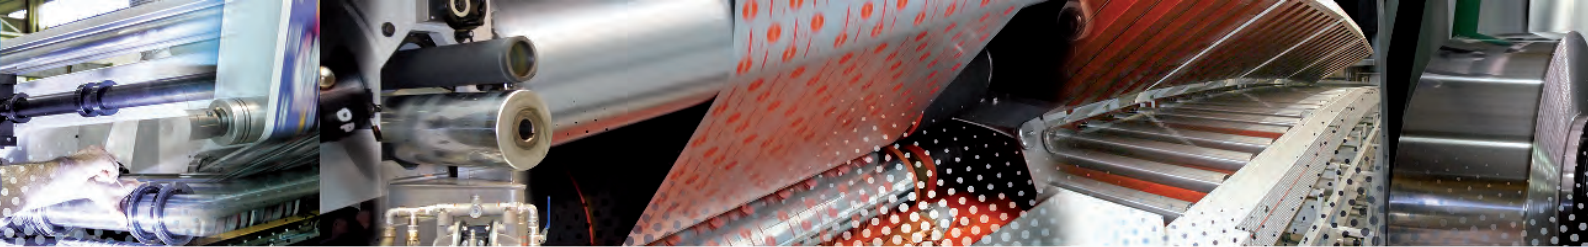

BAGHERA

THE ESSENTIAL IN COMPACT VERSION

- *Fast installation*
- *User -friendly*
- *Low maintenance*
- *Low energy consumption*
- *Flexibility*

Compact Slitter Rewinder

SPECIFICATIONS

- Web width min - max: 500 mm - 1450 mm (20" / 57")
- Maximum total width of the slit rolls: 1400 mm (55")
- Mother roll max diameter: 800 mm (31.5")
- Mother roll max weight: 800 kg (1760 lbs)
- Unwind max web tension: 400 N (88 lbs)
- Slit roll max diameter: 610 mm (24")
- Max weight per rewind shaft: 250 kg (550 lbs)
- Max web tension per shaft: 250 N (55 lbs)
- Production speed: 500 m/min (1640 fpm)
- Compatible BRC

SUBSTRATES :

- Aluminum from 20 µm
- PET from 12 µm
- PVC from 20 µm
- OPP from 17 µm
- PE..... from 50 µm
- Paper..... from 30 gsm
- Laminated films / paper / alu

CONSTRUCTION

- Integrated shaftless unwind
- Automatic web guide
- Razor slitting
- Differential rewind shafts
- Single rotation unloading beam RBX1
- Friendly intuitive HMI
- Machine driven by two synchronous motors



- #### OPTIONS
- 1000 mm unwind diameter (39.37")
 - Mechanical chucks 70 / 76 / 152 mm (2.8" / 3" / 6")
 - Shear slitting with individual knife holders
 - Integrated edge trim exhauster
 - Core positioning laser lights
 - Static electricity discharging bars

Our web site www.dcm.fr

DCM
45 avenue des Guillaeraies
92000 Nanterre - France
Tel.: +33 (0) 1 41 37 52 70

ATN division
970 rue de la Bergeresse
45160 Olivet - France
Tel.: +33 (0) 1 41 37 52 70

DCM North America, Inc.
16335W Lincoln avenue
New Berlin, WI 53151 - USA
Tel.: +1-262-797-4326